

# DOT SIGHTS & MAGNIFIERS

## CONFIDENCE SQUARED AWAY

Follow through with confidence. UTG® offers a wide selection of MRDS (Micro Reflect Dot Sights) and closed-emitter dot sights to choose from. Mount the ACCU-SYNC® 2521R on your AR for training or a selection from our OP3 line for your next IDPA match. Acquire and transition between targets by fine-tuning your solution across different reticle options, adaptive bases, height profiles, and more.





## JUMP TO A SERIES

<b>UTG® ACCU-SYNC® DOT SIGHTS</b>	066
DS2521R for Mini ACOG® Footprint	067
DS2018R for Mini ACOG® Footprint	067
<b>UTG® OP3 MICRO MRDS</b>	068
Mini Micro MRDS for SHIELD RMSC Footprint	069
MRDS/SL/SLS for DOCTER® Footprint	069
MRDS/SLS for RMR® Footprint	069
<b>UTG® 3X FLIP-TO-SIDE MAGNIFIER</b>	070
<b>UTG® ITA DOT SIGHTS</b>	070

(THIRD PARTY TRADEMARKS MAY BE USED IN THIS CATALOG FOR USER CONVENIENCE TO INDICATE THE FIT OR COMPATIBILITY OF THE APPLICABLE PRODUCT.)



ACCURACY SYNCHRONIZED  
**ACCU-SYNC**



# ACCU-SYNC® 2018R & 2521R DOT SIGHTS

WWW.LEAPERS.COM | SINCE 1992



**ACCU-SYNC® 2018R**  
Manual Brightness

For Mini ACOG® Footprint / Red 3 MOA / 2.24" Length  
/ OP-DS2018R



**ACCU-SYNC® 2521R**  
Manual Brightness


For Mini ACOG® Footprint / Red 3 MOA / 2.66" Length  
/ OP-DS2521R



Low Profile Quick Release (QR) for Mini ACOG® Mount with Lower 1/3 Co-witness Riser Included

## ACCU-SYNC® 2018R & 2521R DOT SIGHTS

- » 3 MOA Red Dot with 8 Brightness Settings
- » 30,000+ Hours Battery Life at Middle Brightness Setting
- » Snag-free Flush Turrets with Crisp 1 MOA Per Click Adjustment at 100 Yards
- » Wide Field of View Lens Diameter
- » Impact Resistant Tempered Glass Lens
- » Precision Machined from 6061-T6 Aluminum and Finished in a Matte Black Anodization
- » IPX7 Waterproof Rated

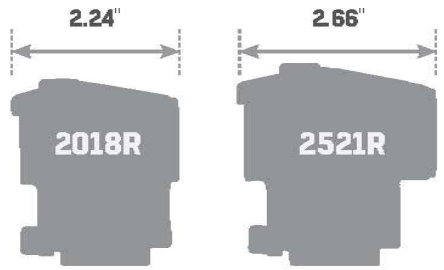

	OP-DS2018R	OP-DS2521R
<i>Mount Footprint</i>	For Mini ACOG®, with Lower 1/3 Co-witness Riser	
<i>Lens Diameter</i>	0.75" (19 mm)	0.79" (20 mm)
<i>Length x Width</i>	2.24" x 1.64"	2.66" x 1.66"
<i>Reticle / Illumination</i>	Red 3 MOA Dot	Red 3 MOA Dot
<i>Illumination Mode</i>	Manual, 8 Settings	Manual, 8 Settings
<i>Adjustment</i>	1 MOA Per Click	1 MOA Per Click
<i>Material</i>	Anodized AL6061	Anodized AL6061
<i>Weight</i>	5.4 oz (153 g)	6.1 oz (173 g)
<i>Battery Life</i>	30,000+ hrs	30,000+ hrs
<i>Battery Type</i>	CR2032 3V	CR2032 3V

# OP3 MICRO



# OP3 MICRO MRDS

WWW.LEAPERS.COM | SINCE 1992



**OP3 MINI MICRO**  
Constant-on Automatic Brightness

For SHIELD RMSC Footprint / Red 3 MOA / OT-RDM16R

Out-of-the-box Compatible with SIG P365X/XL, GLOCK 43X/48 MOS, WALTHER PPS M2 RMSC, SPRINGFIELD ARMORY HELLCAT OSP, RUGER MAX-9, S&W PERFORMANCE CENTER M&P SHIELD M2.0, and Most Other Optics-Ready Pistol Platforms



**OP3 MICRO**  
Manual Brightness

For DOCTER® Footprint / Red 4 MOA / OP-RDM20R  
For DOCTER® Footprint / Green 4 MOA / OP-RDM20G  
For RMR® Footprint / Red 4 MOA / OP-RMR20R



**OP3 MICRO SL**  
Manual Brightness / Side Loading Battery

For DOCTER® Footprint / Red 4 MOA / OP-RDM20CT

**OP3 MICRO SLS**  
Auto Sensing Brightness with Manual Override / Side Loading Battery

 For DOCTER® Footprint / Red 4 MOA / OP-RDM20CTS  
For RMR® Footprint / Red 4 MOA / OP-RMR20CTS

	OT-RDM16R	OP-RDM20R	OP-RDM20G	OP-RDM20CT	OP-RDM20CTS	OP-RMR20R	OP-RMR20CTS
<b>Mount Footprint</b>	For SHIELD RMSC	For DOCTER®	For DOCTER®	For DOCTER®	For DOCTER®	For RMR®	For RMR®
<b>Lens Diameter</b>	0.85" x 0.59"	0.89" x 0.68"	0.89" x 0.68"	0.89" x 0.68"	0.89" x 0.68"	0.89" x 0.68"	0.89" x 0.68"
<b>Length x Width</b>	1.60" x 0.95"	1.90" x 1.14"	1.90" x 1.14"	1.90" x 1.14"	1.90" x 1.14"	1.78" x 1.14"	1.78" x 1.14"
<b>Reticle / Illumination</b>	Red 3 MOA Dot	Red 4 MOA Dot	Green 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot	Red 4 MOA Dot
<b>Illumination Mode</b>	Automatic, Constant-on	Manual	Manual	Manual	Manual & Auto Sensing	Manual	Manual & Auto Sensing
<b>Adjustment</b>	N/A	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click	1 MOA Per Click
<b>Co-witness</b>	Lower 1/3 Co-witness with Most Standard Height Iron Sights	Co-witnesses with Most Suppressor Height Iron Sights					
<b>Material</b>	Matte Black Anodized 6061-T6 Aluminum Body, Glass Lens						
<b>Weight</b>	0.7 oz (20 g)	1.2 oz (34 g)	1.2 oz (34 g)	1.2 oz (34 g)	1.2 oz (34 g)	1.1 oz (31 g)	1.2 oz (34 g)
<b>Battery Life</b>	30,000+ hrs	55,000+ hrs	20,000+ hrs	15,000+ hrs	15,000+ hrs	55,000+ hrs	15,000+ hrs
<b>Battery Type</b>	CR2032 3V	CR2032 3V	CR2032 3V	CR1632 3V	CR1632 3V	CR2032 3V	CR1632 3V
<b>Battery Loading</b>	Bottom Loading	Bottom Loading	Bottom Loading	Side Loading	Side Loading	Bottom Loading	Side Loading



## ITA DOT SIGHTS & MAGNIFIER




Bidirectional Offset Mount Included



### 3X QD FLIP-TO-SIDE MAGNIFIER

- » Windage/Elevation Adjustability for Optimum View Centering
- » 42 mm Center Height for Most Common Dot Sight Combination
- » Perfect Match with: SCP-DS3840W, SCP-DS3039W, SCP-DS3840TDQ
- » Match with 0.60" Riser: SCP-RD40RGW-A
- » Match with 0.75" Riser: SCP-RG40SDQ, SCP-RG40CDQ
- » US PAT. 8397421, US PAT. D672839, EU PAT. EP1984576-0001

Integral QD Mount / SCP-MF3WEQS



### 6.0" ITA DOT SIGHT

- » Built on TRUE STRENGTH® Platform
- » Unlimited Eye Relief and Intuitive, Quick-to-acquire Red/Green T-dot Reticle for Swift Execution of T-Zone and Center Mass Hits
- » Premium Zero Lockable and Zero Resettable Target Turrets with Most Consistent, Precise and Reliable 1/2 MOA per Click Adjustment and Zero Hold Capability
- » 42mm Center Height for 1/3 Co-witness of Front and Rear Iron Sights
- » US PAT. 8397421

RG T-Dot / Bidirectional QD Mount / SCP-TDQ




Offset Riser Applications



### 4.2" ITA DOT SIGHTS

» US PAT. 8397421

**RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3840W**  
**RG T-Dot / Adjustable Riser / SCP-DS3840TDQ**

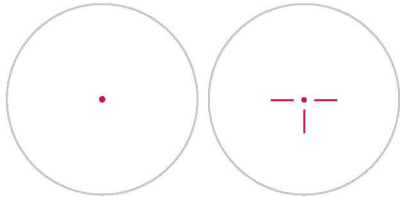


Offset Riser Applications



### 3.9" ITA DOT SIGHT

» US PAT. 8397421


**RG 4 MOA Single Dot / Adjustable Riser / SCP-DS3039W**



### 3.8" ITA DOT SIGHTS

» US PAT. 8397421


**RG 4 MOA Single Dot / Integral Mount / SCP-RD40RGW-A**  
**RG Circle Dot / Integral QD Mount / SCP-RG40CDQ**

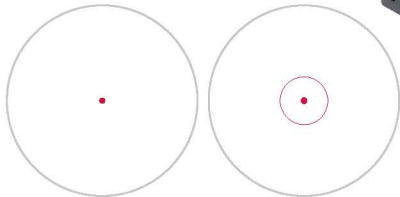

### 2.6" ITA DOT SIGHT

» US PAT. 8397421

**RG 4 MOA Single Dot / Integral QD Mount / SCP-DS3026W**



	SCP-MF3WEQS	SCP-TDQ	SCP-DS3840W	SCP-DS3840TDQ	SCP-DS3039W	SCP-RD40RGW-A	SCP-RG40CDQ	SCP-DS3026W
<i>Reticle / Illumination</i>	-	T-DOT / RG	Single Dot / RG	T-DOT / RG	Single Dot / RG	Single Dot / RG	Circle Dot / RG	Single Dot / RG
<i>MOA</i>	-	-	4 MOA	-	4 MOA	4 MOA	-	4 MOA
<i>Magnification</i>	3X	1X	1X	1X	1X	1X	1X	1X
<i>Main Tube Diameter</i>	44 mm	38 mm	38 mm	38 mm	30 mm	38 mm	38 mm	30 mm
<i>Objective Diameter</i>	25 mm	39 mm	32 mm	32 mm	26 mm	30 mm	30 mm	21 mm
<i>FOV @ 100 Yards</i>	45'	85'	103'	103'	75'	95'	95'	95'
<i>Eye Relief</i>	2"	Unlimited						
<i>Exit Pupil</i>	8.7 mm	Unlimited						
<i>Click Value</i>	-	1/2"						
<i>Center Height</i>	42 mm	42 mm	32 mm (42 mm w/riser)	32mm (42mm w/riser)	30 mm (40 mm w/riser)	25.5 mm	25.5 mm	25 mm
<i>Length</i>	4"	6"	4.2"	4.2"	3.9"	3.8"	3.8"	2.6"
<i>Weight</i>	11.8 oz (335 g)	13.1 oz (371 g)	8.7 oz (247 g)	8.7 oz (247 g)	8.3 oz (235 g)	9.4 oz (266 g)	8.4 oz (238 g)	4.9 oz (139 g)
<i>Battery Type</i>	-	CR1620 3V				CR2032 3V		CR1620 3V