



U n l e a s h T h e G l o w



---

**NEW GEN**

---

U n l e a s h T h e G l o w

**OWNER'S  
MANUAL**

**LT-EL138** LED Flashlight



## CAUTION!

If you need to mount the flashlight onto a firearm, make sure firearm is not loaded before installation. Remove magazine and examine chamber. Use safe handling procedures at all times.

Tactical flashlights produce substantial heat during operation. Do not leave activated flashlight unattended. Do not set activated flashlight face down. Do not place activated flashlight against combustible material or material that could be damaged by heat. Do not hold bezel or lens of activated flashlight against any portion of human body. Keep away from children.

Ensure that the flashlight cannot be turned on when stored or being transported. If the lamp is activated while in a case or any container, the lamp could overheat and cause damage to surrounding materials.

Examine battery quality and appearance before use each time and make sure that there is no leaking or any deformation. Dispose appropriately if there is a problem.

The batteries are pre-charged by the manufacturer, and cannot be recharged. Recharging can cause battery leakage or, in some cases, high-pressure rupture. Inadvertent charging can occur if a battery is installed backwards.

Do not use re-chargeable batteries in the light. Only non-rechargeable batteries should be used with the light.

Install batteries by aligning the + and – signs marked on the battery with the + and – signs marked on the battery chamber in the light.

Turn off the light when not in use to conserve battery power.

Make sure to turn off the light or disconnect the pressure switch before inspecting bulb and battery if the light cannot be turned on.

Keep batteries cool and dry. Always remove batteries from light after use. Leaving battery in the light without use for long period of time may cause damage or danger.

Always replace batteries with the exact type and size specified for the light.

Always replace the whole set of batteries at the same time. Never mix new and used batteries in the same light.


Never deliberately short circuit batteries. Prolonged short circuit will cause the battery to lose energy and result in significant temperature increase.

Keep battery compartment clean and keep any metallic object away from the battery.

Lithium batteries can explode or cause burns if disassembled, shorted, recharged, exposed to water, fire, or high temperatures. Do not place loose batteries in a pocket, purse, or other container containing metal objects. Do not mix new with used batteries or mix required batteries with other types of battery. Do not store batteries with hazardous or combustible materials. Store in cool, dry, ventilated area. Follow applicable laws and regulations for disposal.

## Component Illustration

EL138 (Model Number)  
AQN0040UB49U (Example Serial Number)

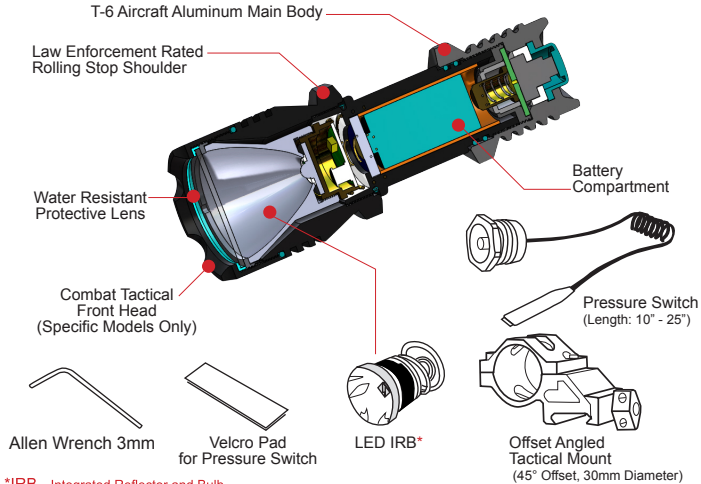

\*IRB - Integrated Reflector and Bulb

LT-EL138		
Specs	Length	116.8mm (4.6")
	Main Body Diameter	27.2mm (1.07")
	Weight with Battery	199g (7oz)
	Bulb Type	IRB* with Cree XML LED
	Voltage	3V
	Max. Output	200 lumens
	Focus	Preset Spot
Accessory	Battery/Qty	CR123A x 1
	Pressure Switch	Included
	Offset Angled Tactical Mount	Included



The purpose of the diagram is to provide a better understanding of the superior internal structure of the flashlight. Please do NOT disassemble the product which will void its warranty unless it is for replacing battery.

## Installation & Operation

### Battery Installation

1. Unscrew the end cap and install a CR123A lithium battery (Fig.1.1).
2. Replace and tighten the end cap (Fig.1.2).

### Two Operation Modes

#### 1. Push Button Operation

- 1). Ensure the end cap is properly tightened (Fig.2.1).
- 2). Press and release the button in the center of the end cap to turn the light on or off (Fig.2.2).

#### 2. Pressure Switch Operation

- 1). Unscrew and remove the push button end cap (Fig.2.3). Make sure to keep the cap in a safe place for replacement when Pressure Switch is not used.
- 2). Screw the end cap from the Pressure Switch onto the light and tighten snugly (Fig.2.4).
- 3). Depress the Press Pad of the switch to turn on the light and release to turn off (Fig.2.5).



### Mounting the Flashlight

#### Offset Angled Tactical Flashlight Ring Mount (RG-FL138)

- 1). Remove the top half of the ring by loosening the screws and slowly backing them out (Fig.3.1).
- 2). Place the flashlight on the ring base (Fig.3.2).
- 3). Replace the top ring half on the flashlight (Fig.3.3).
- 4). Tighten the screws evenly with included Allen wrench to ensure a firm grip on the flashlight (Fig.3.4).
- 5). Attach the ring base to the rail mount of the rifle. Hand tighten the quick lock/release Thumb Nut for proper tension and fit against the rail (Fig.3.5).  
Recommended torque value: 20-inch-lb.




## Replacement Parts

Contact your distributor for information:



Lithium Battery

1PC of CR123A  
Lithium Battery



Pressure Switch



RG-FL138

UTG Offset Angled Low Profile  
Tactical Flashlight Ring

## Maintenance

1. Maintain the metal surface of the flashlight by removing any dirt or sand with a soft brush to avoid scratching the finish.
2. Store the flashlight in a cool dry place when not in use. Be careful to avoid contact with acid, alkaline or corrosive chemicals.
3. Replace the batteries in your flashlight every few months if it was not used for long period of time. This insures good working batteries for your light and prevents battery leakage.
4. Keep a fresh package of batteries next to your flashlight. This gives you back-up power for your light.
5. Do not store your flashlight in high temperatures. This would damage your flashlight and may result in battery leakage.
6. Do not put the flashlight head against any surface especially paper or human skin for it has heat and may result in accidents.
7. Do not leave your flashlight under the seat in your car, or in direct sunlight to avoid over-heating.
8. Do not attempt to lubricate any part of the flashlight.
9. Do not disassemble the flashlight other than replacing battery or pressure switch. Do not loosen or remove screws or parts. Any such or similar actions will void the warranty.

## The Best Never Rest Warranty - Lifetime

Leapers, Inc. warrants that all UTG & UTG PRO products conform to published specifications and are free from defects in material and workmanship. We will repair or replace defective products for the duration of the product's life span. Our dedicated and professional in-house customer service team will go above and beyond to make things right and provide the best in-class customer service experience you expect to receive.

Our warranty does not extend to products damaged from misuse, accidental damage, negligence, natural disasters/accidents, or unauthorized repair or alteration.

For warranty service, please submit your inquiry by visiting our customer service page on our website at [www.leapers.com](http://www.leapers.com) or give us a call at 734-542-1500. A Return Authorization Number (RMA) must be assigned before returning any products for warranty service.

## Disclaimer and Limitation of Liability

Leapers is pleased to offer suggestions of the use of its products, however Leapers neither assumes responsibility for any omissions or errors nor assumes liability for any damages that result from the use of its products in accordance with information provided by Leapers, whether verbal or written.

EXCEPT FOR THE EXPRESS WRITTEN WARRANTY SPECIFICALLY SET FORTH ABOVE, ALL EXPRESS AND IMPLIED REPRESENTATIONS AND WARRANTIES ARE HEREBY DISCLAIMED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, NON-INTERFERENCE, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, OR WARRANTY OF ACCURACY OF ANY INFORMATION PROVIDED WHETHER WRITTEN OR ORAL. ALL WARRANTIES ARISING FROM ANY COURSE OF DEALING, LAW, USAGE OR TRADE PRACTICE ARE HEREBY EXPRESSLY EXCLUDED TO THE EXTENT ALLOWED BY LAW. TO THE EXTENT AN IMPLIED WARRANTY CANNOT BE EXCLUDED, SUCH WARRANTY IS LIMITED IN DURATION TO ONE YEAR. SOME STATES OR JURISDICTIONS DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

UNDER NO CIRCUMSTANCES IS LEAPERS, OR ITS SUPPLIERS OR RESELLERS LIABLE FOR ANY OF THE FOLLOWING EVEN IF INFORMED OF THEIR POSSIBILITY: 1) THIRD PARTY CLAIMS AGAINST YOU FOR DAMAGES; 2) SPECIAL, INCIDENTAL, OR INDIRECT DAMAGES OR FOR ANY ECONOMIC CONSEQUENTIAL DAMAGES; OR 3) LOST PROFITS, BUSINESS REVENUE, GOODWILL, OR ANTICIPATED SAVINGS. SOME STATES OR JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.