

UTG TACTICAL
FAL QUAD RAIL HANDGUARD
MNT-HG981

- UTG Tactical Quad-rail Handguard System for FAL Rifles and Variants
- Precision Machined from Aircraft Grade Aluminum for Maximum Strength
- 22 Top Slots, 25 Left and Right Side Slots and 25 Bottom Slots
- Innovative Interlocking Design Features Lower Mount Mating with the Upper Mount
- Adopts Original Handguard Dimensions for the Most Solid and Secure Fit
- Great Zero Retention Capability for All Accessories Installed on the Rails
- Intensively Tested by Field Experts and Well Received Internationally
- Friendly Installation, No Gunsmithing Required
- Complete with 19 PCs UTG Heat-Resistant Rail Guard


UTG TACTICAL
FAL QUAD RAIL
HANDGUARD



MNT-HG981

UTG TACTICAL
FAL QUAD RAIL HANDGUARD
MNT-HG981

Caution: Make sure firearm is not loaded. Remove magazine and examine chamber. Use safe handling procedures at all times.

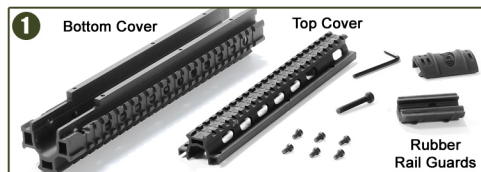


1. Separate the pre-assembled mount and arrange all parts on a flat surface.




2. Remove the original, plastic left and right handguards from the rifle.



3. Fit the Bottom Cover onto the barrel with the back end inserted into the Rear Assembling Cap on the barrel. Make sure the fit is even and level.

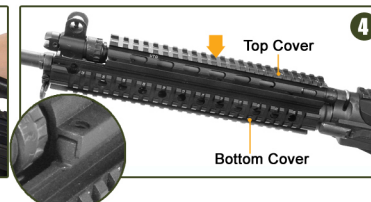

4. Fit the Top Cover onto the gas tube. Make sure the two connecting walls of the Bottom Cover sit into the two mating channels of the Top Cover and all screws/holes are well aligned.



5. Align the side screw holes at the front of the Bottom Cover with the screw holes on the Front Sight Block, and tighten the screw with the provided Allen wrench for secure fit.



6. Evenly tighten all six screws on the top to securely lock the Bottom Cover and Top Cover.



7. Align the locking nub in the under side of the rubber rail guard to a desired rail slot on a rail. Extend the rubber rail guard to horizontally situate the locking nub into the rail slot. Push the whole piece to click into the rail for a tight fit.