

UTG **MP**
METAL TRI-RAIL SYSTEM
MNT-HGMP5A

- UTG One-Piece Design Quick Fit Metal Tri-rail Handguard System for MP5 and Variants
- Precision Machined from Aircraft Grade Aluminum for Maximum Strength
- 12 Slots Each on Left, Right and Bottom Rails
- Adopts Original Handguard Dimensions and Locking System for the Most Solid and Secure Fit
- Great Zero Retention Capability for All Accessories Installed on the Rails
- Intensively Tested by Field Experts and Well Received Internationally
- Friendly Installation, No Gunsmithing Required
- Complete with 9 PCs UTG Heat-Resistant Rail Guard

UTG®




UTG MP
METAL
TRI-RAIL SYSTEM




MNT-HGMP5A

UTG MP
METAL TRI-RAIL SYSTEM
MNT-HGMP5A

Caution: Make sure firearm is not loaded. Remove magazine and examine chamber. Use safe handling procedures at all times.

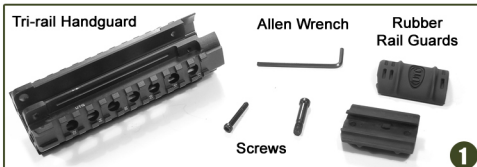


1. Separate the pre-assembled Tri-rail Handguard and arrange all parts on a flat surface.



2. Remove the Locking Pin from the gas tube block, and remove the original plastic handguard from the rifle.



3. Position the Tri-rail Handguard under and parallel to the barrel about 1" below. Tilt the rear end of the Handguard upward, and push it backward to secure into the lower receiver firmly.

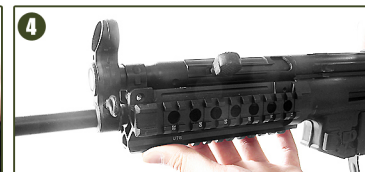

4. Push the front end of the Handguard upward to make sure that the Handguard surrounds the barrel evenly.



5. Align the 2 screw holes at the front side of the Handguard with the Locking-Pin hole on the gas tube block. Tighten the front screw with provided Allen wrench to lock the Handguard firmly.



6. Tighten the rear screw evenly to complete the Tri-rail Handguard installation.



7. Align the locking nub in the under side of the rubber rail guard to a desired rail slot on a rail. Extend the rubber rail guard to horizontally situate the locking nub into the rail slot. Push the whole piece to click into the rail for a tight fit.