

UTG PRO **MADE IN USA** GEN III ADJUSTABLE STOCK ADAPTOR FOR AK AND VARIANTS

RB-K7M4AD02



1. Press the release button forward, lift and remove the receiver cover.



2. Push the release button forward again to lift and remove the action spring and the retaining rod.



3. Unscrew the 2 buttstock screws and remove the buttstock.



4. Install a model 4/15 aluminum buffer tube into the adaptor by turning the tube clockwise and tighten all the way.



5. Align the set screw on the adaptor with the Slot Cut on the buffer tube. (Loosen the adaptor if needed.) Tighten down the set screw to securely lock the adaptor onto the tube.




6. Tightly secure the locking ring with a locking wrench by turning it counter-clockwise.

Caution: Make sure firearm is not loaded. Remove magazine and examine chamber. Use safe handling procedures at all times.



7. Test fit the stock adaptor on the receiver. Make appropriate adjustment by using a hand file if needed. A couple of washers are provided for optional placement under the metal buttstock tang for fit adjustment. When satisfied with the fit, insert the adaptor into the receiver under the Metal Tang.

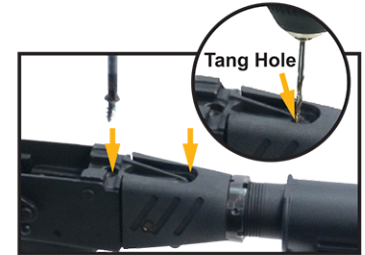

8. Once the adaptor is properly installed, use the 2 tang holes on the receiver as the guide to drill two 1/8" holes into the stock adaptor through the tang holes. Insert the self-tapping screws provided with the adaptor. Gently tap and then tighten to complete installation.

OPTIONAL: Cheek Position Adjustment Instruction



A. Use the Allen Wrench provided to unscrew and remove the side locking screw. Pull off the rear portion of the adaptor.



B. Re-align the teeth between the rear and front portions of the adaptor to achieve the preferred height for cheek position. Replace and tighten the side locking screw securely.